

# Rushlight Micro

Technical specification / MEYE

## Contents


Select a section or page number to jump to it. Use Contents in the footer to return.

|                              |   |
|------------------------------|---|
| 01 Product overview          | 2 |
| 02 Light & electrical        | 3 |
| 03 Mechanical & construction | 3 |
| 04 Service & circularity     | 3 |
| 05 Product FAQs              | 4 |

Generated from current saved product details, specification notes and published FAQs. Downloaded copies are dated snapshots. Regenerate after changes. Unanswered fields are omitted. Check suitability for your project before installation.

## 01 Product overview

# Rushlight Micro

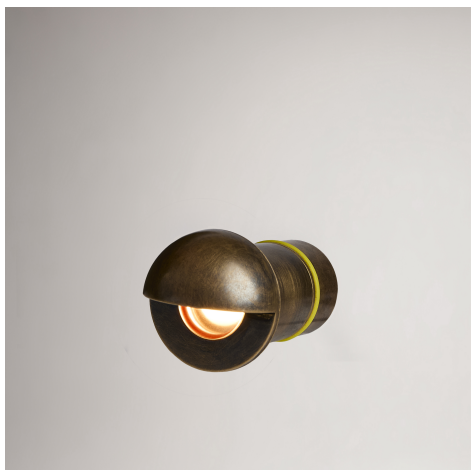

|                            |          |
|----------------------------|----------|
| Product code               | MEYE     |
| Product reference          | 10038    |
| Rated power (standard LED) | 1.6 W    |
| Ingress protection         | IP68     |
| Standard cable length      | 2.00 m   |
| Standard weight            | 155 g    |
| Warranty period            | 10 years |

Product record updated: 2026-09-09 18:51:49

Specification notes revision: 0

## 02 Light & electrical

|                                                  |                                                                                                                                                                                                     |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Available LED options (colour / power)           | 2700K warm white; Monochromatic amber (1.6 W nominal LED)                                                                                                                                           |
| Nominal LED power                                | 1.6 W                                                                                                                                                                                               |
| Supply / wiring                                  | DC supply; parallel wiring with parallel protection circuit                                                                                                                                         |
| 2700K warm white supply current / input power    | 12V DC: 0.16 A / 1.92 W<br>15V DC: 0.12 A / 1.80 W<br>24V DC: 0.07 A / 1.68 W                                                                                                                       |
| Monochromatic amber supply current / input power | 12V DC: 0.13 A / 1.56 W<br>15V DC: 0.11 A / 1.65 W<br>24V DC: 0.06 A / 1.44 W                                                                                                                       |
| Electrical measurement notes                     | Supply current is measured; input power is calculated as voltage multiplied by current. Nominal LED wattage is separate from supply input power. Figures apply to the US parallel-protection build. |

## 03 Mechanical & construction

|                         |                                           |
|-------------------------|-------------------------------------------|
| Body material by finish | Hand aged brass: CNC machined Brass CZ121 |
| Available finishes      | Hand aged brass                           |

## 04 Service & circularity

|                       |     |
|-----------------------|-----|
| TM66 assessment score | 2.6 |
|-----------------------|-----|

## 05 Product FAQs

### Which LED colors are available in the U.S.?

For the U.S. range, you can choose 2700K warm white or monochromatic amber. Select your preferred LED color when configuring the light.